

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 August 2003 (28.08.2003)

PCT

(10) International Publication Number  
**WO 03/070827 A1**

(51) International Patent Classification<sup>7</sup>: C08L 59/00

(21) International Application Number: PCT/KR03/00362

(22) International Filing Date: 21 February 2003 (21.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10-2002-0009978  
25 February 2002 (25.02.2002) KR

(71) Applicant (for all designated States except US): KOREA  
ENGINEERING PLASTICS CO., LTD. [KR/KR]; 450,  
Gongduk-2dong, Mapo-gu, Seoul 121-805 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KIM, Tak-Kyu  
[KR/KR]; 103-1002 Samsung Chereville, Sanghyun-ri,  
Sooji, Yongin, Gyeonggi 449-843 (KR). JUNG,  
Chung-Youl [KR/KR]; 205-1202 Hangaram Apt., 1586-5

Gwanyang-dong, Dongan-gu, Anyang, Gyeonggi 431-060  
(KR). SHIN, Ki-Chul [KR/KR]; 403-603 Hanra Apt.,  
1156-1 Ogum-dong, Gunpo, Gyeonggi 435-857 (KR).


(74) Agents: SON, Won et al.; C & S Patent and Law Office,  
C-2306 Daelim Acrotel, 467-6 Dogok-dong, Kangnam-gu,  
Seoul 135-971 (KR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GI,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK,  
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,  
MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG,  
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,  
VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GI, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,  
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,  
GQ, GW, ML, MR, NI, SN, TD, TG).

[Continued on next page]

(54) Title: POLYACETAL RESIN COMPOSITION HAVING EXCELLENT WEAR RESISTANCE AND ABRUPTION-PREVENTING EFFECT

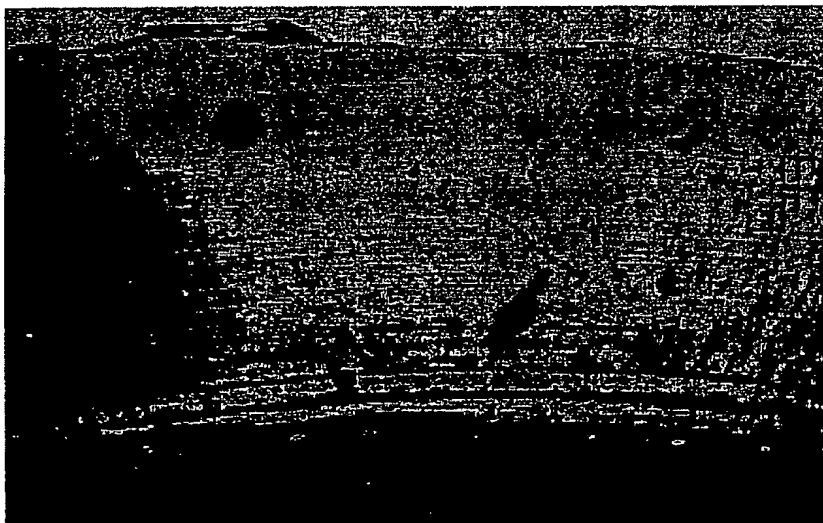

(57) Abstract: Disclosed is a polyacetal resin composition, including a polyoxymethylene homopolymer or copolymer, an antioxidant, a thermal stabilizer, a polyethylene vinylacetate copolymer and hydroxyl pentacrythritol fatty acid ester. The polyacetal resin composition is excellent in mechanical properties, chemical resistance, heat resistance, dimensional stability, and electrical properties. Further, the composition is advantageous in terms of superior wear resistance and abruption-preventing effect.

BEST AVAILABLE COPY



WO 03/070827 A1